

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 844 614 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
27.05.1998 Bulletin 1998/22

(51) Int Cl.<sup>6</sup> **G11B 27/10, G11B 27/36,  
G11B 19/02, G11B 27/34**

(21) Application number: **97307644.1**

(22) Date of filing: **20.09.1997**

(84) Designated Contracting States:  
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE**

(72) Inventor: **Usui, Shunji**  
**Shirakawa, Fukushima 961 (JP)**

(30) Priority: **20.11.1996 JP 324795/96**


(74) Representative: **Hackney, Nigel John et al**  
**Mewburn Ellis,**  
**York House,**  
**23 Kingsway**  
**London WC2B 6HP (GB)**

(71) Applicant: **Nippon Columbia Co., Ltd.**  
**Tokyo 107-11 (JP)**

**(54) Optical disc reproducing apparatus**

(57) An optical disc reproducing apparatus which is useful and can preliminarily read and edit audio data to be reproduced and output the edited data is provided. The optical disc reproducing apparatus comprising: reproducing means for reproducing recording data of an optical disc; storing means for storing the recording data

reproduced from the optical disc; input means for inputting an address of the recording data stored in the storing means; output means of at least one system for outputting the recording data stored in the storing means; and control means for controlling so as to read the recording data from a start address inputted by the input means and output the read data from the output means.

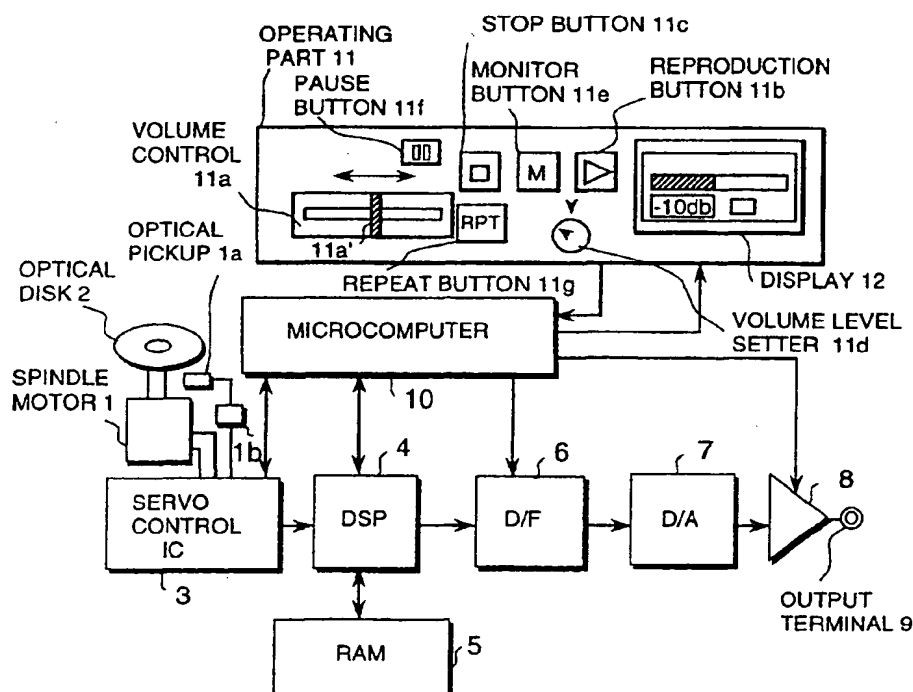**FIG. 1**

## Description

The present invention relates to an optical disc reproducing apparatus.

A sound is often generated for live broadcasting or the like by a DJ (disc jockey), a broadcasting station, or the like. In order to sequentially generate a plurality of sounds, it is necessary to prepare the next sound to be reproduced during generation of a sound.

For example, when there is a stop by a pause during sounds recorded in a disc or there is a defect in a disc so that data cannot be reproduced, a conventional apparatus cannot promptly deal with such a case. There are consequently problems such that data cannot be reproduced by promptly skipping the defect or the like and a sound in which data is skipped by the defect or the like is generated as it is.

Preferably, the invention provides a useful optical disc reproducing apparatus which can preliminarily read and edit audio data to be reproduced and generate the edited audio data.

According to an aspect of the invention, there is provided an optical disc reproducing apparatus for reproducing recording data recorded on an optical disc, comprising:

reproducing means for reproducing the recording data recorded on the optical disc;  
storing means for storing the recording data reproduced by the reproducing means;  
input means for inputting at least one address of the recording data stored in the storing means;  
output means of at least one system for outputting the recording data stored in the storing means; and  
control means for controlling so as to read the recording data based on the address inputted by the input means and to output the recording data from the output means.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing an embodiment of an optical disc reproducing apparatus of the invention;

Fig. 2 is a diagram illustrating a volume control in the optical disc reproducing apparatus according to the embodiment of the invention;

Fig. 3 is a flowchart showing an operation of the optical disc reproducing apparatus according to the embodiment of the invention;

Fig. 4 is a diagram showing a control of the level of audio data reproduced by the optical disc reproducing apparatus according to the embodiment of the invention; and

Fig. 5 is a block diagram showing another embodiment of the optical disc reproducing apparatus of the invention.

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Fig. 1 is a block diagram showing an embodiment of the optical disc reproducing apparatus of the invention. The number of rotations of an optical disc 2 attached to a spindle motor 1 is controlled by a servo control IC 3. A signal read from the optical disc 1 by an optical pickup 1a and amplified by a head amplifier 1b is demodulated by a demodulating circuit (not shown) in the servo control IC 3 to audio data and the audio data is outputted to a DSP (Digital Signal Processor) 4. The audio data processed by the DSP 4 is stored in a RAM (Random Access Memory) 5. The audio data read from the RAM 5 by the DSP 4 is interpolated and filtered by a D/F (Digital Filter) 6 and is digital-analog converted by a DA (Digital Analog) converter 7 and resultant data is outputted from an output terminal 9 via an amplifier 8.

The servo control IC 3, DSP 4, D/F 6, and amplifier 8 are controlled by a microcomputer 10. The level of an output of the amplifier 8 is variably controlled by the microcomputer 10. A reproducing position of the audio data is instructed by a volume control 11a of an operating part 11. The operating part 11 has a reproduction button 11b, a stop button 11c, a volume level setter 11d for setting the maximum value of the audio level, a monitor button 11e, a pause button 11f, and a repeat button 11g.

The operating part 11 also includes a display 12 such as a liquid crystal display on which the sound level and the reproducing position of the audio data are displayed.

Fig. 2 is a diagram illustrating the volume control in the optical reproducing apparatus according to the embodiment of the invention.

A position indicated by an indicator 11a' of the volume control 11a and an address of the audio data stored in the RAM 5 correspond to each other. A start address of the audio data is changed in accordance with the movement of the indicator 11a'.

For example, when the indicator 11a' is moved to the left end of the volume control 11a, the audio data is read from the head address. When the pause button 11f is depressed after operating the indicator 11a', the address when the pause button 11f is depressed is decided, so that data between two positions can be designated.

Although the volume control in a sliding type is used in the embodiment, a volume control of another type, for example, a rotating type can be also used as long as a positional relation with the address in the RAM 5 is known.

When the monitor button 11e is depressed, the audio data is started to be stored in the RAM 5 and the recording operation is stopped after storing the audio data of a predetermined memory capacity. When the reproduction button 11b is depressed and actual reproduction is started, the reading operation is started from the head address of the audio data stored in the RAM

5 and the read data is outputted from the output terminal 9 via the D/F 6, D/A converter 7, and amplifier 8. Simultaneously, a connecting part of the audio data stored in the optical disc 2 is detected from the end address of the audio data stored in the RAM 5 and the audio data read from the optical disc 2 is started to be stored in the RAM 5 subsequent to the end address of the audio data stored in the RAM 5.

With the construction shown in Fig. 1, the audio data cannot be monitored as a sound but the level can be monitored by the display 12. The maximum level value of the sound to be outputted is set by the volume level setter 11d, and the level of the sound to be outputted is monitored by the DSP 4 and is controlled by the microcomputer 10 so as not to exceed the maximum level value.

When the indicator 11a' of the volume control 11a is operated to designate two points and the repeat button 11g is depressed once, the audio data between the two points is read once and reproduced or monitored. When the repeat button 11g is depressed twice successively, the audio data between the two points can be repeatedly reproduced and monitored. Parts exceeding the maximum level value of the sound can be easily and preliminarily confirmed by the display 12.

For example, when two or more optical disc reproducing apparatus as mentioned above are used, audio data can be outputted after matching the output level of a sound to be outputted ahead and that of a sound to be subsequently outputted. An unnatural sound output occurring due to the level difference of sounds when a sound is switched to another sound can be prevented.

Fig. 3 is a flowchart showing an operation of the optical disc reproducing apparatus according to an embodiment of the invention. Fig. 4 is a diagram illustrating the level control of the audio data of the optical disc reproducing apparatus according to the embodiment of the invention.

The maximum level value of the sound to be outputted is preset by the volume level setter 11d of the operating part 11. In step ST1, it is judged whether a signal level of the audio data exceeds the maximum level value (predetermined threshold level) or not. When the signal level exceeds a predetermined threshold level (Y in step ST1), the DSP 4 notifies the microcomputer 10 of the level over. In step ST2, time X when the signal level exceeds the threshold is stored in the RAM 5 as shown in Fig. 4. Considering a delay of an output, when the microcomputer 10 detects that time is  $X - T$  (W in Fig. 4) (Y in step ST3) by going back time from the time X by a time T (for example, about 1 second), the level is started to be lowered in step ST4.

The microcomputer 10 gradually attenuates the level of the audio data until the level of a waveform A is reduced to the level of a waveform B. It is judged in step ST5 whether the level is within set level or not. When it is in the predetermined set level (Y in step ST5), time Y when the level is returned to the predetermined set level

is stored in the RAM 5 in step ST6. In step ST7, when time reaches  $Y + t$  (Z in Fig. 4) (Y in step ST7), in order to return the audio data to the original level at the point Z, the microcomputer 10 variably changes an attenuation rate, for example, to 0.7, 0.8, 0.9, and 1 so as to raise the level in step ST8, thereby returning the level to the original level. When it is detected in step ST9 that the level is returned to the original level (Y in step ST9), the processing routine is finished.

Fig. 5 is a block diagram showing another embodiment of the optical disc reproducing apparatus of the invention. Descriptions of components similar to those in the block diagram of Fig. 1 are omitted here. In Fig. 5, the audio data is outputted from a loud speaker 9a connected to the amplifier 8. A headphone 9b for monitoring is provided and the audio data stored in the RAM 5 is outputted via the DSP 4, D/F 6a, D/A converter 7a, amplifier 8a, and headphone 9b.

The operation of the optical disc reproducing apparatus will be described hereinbelow with reference to Fig. 5.

When the monitor button 11e is depressed, the audio data is read from the optical disc 2 and is stored into the RAM 5. The audio data read out from the RAM 5 can be monitored by the headphone 9b. When the reproduction button 11b is depressed, the audio data is started to be outputted from the loud speaker 9a. Since the audio data can be monitored by the headphone 9a before outputting it from the loud speaker 9a, the audio data to be outputted can be edited previously.

For example, in case of pausing in a position, when the user depresses the pause button 11f while monitoring the audio data by using the headphone 9b, the audio data is paused in the position when the pause button 11f is depressed, so that the address corresponding with the paused position is the start address when the audio data will be reproduced next. Further, by moving the indicator 11a' of the volume control 11a to the right and left with respect to the paused position, the audio data preceding and subsequent to the paused position can be monitored. Therefore, the start position when the audio data will be reproduced next can be accurately decided.

The indicator 11a' is moved to the head and the end of certain data in audio data and the two points are decided by depressing the pause button 11f, thereby enabling data in a specific interval to be selected. When the repeat button 11g is depressed after the selection, the data in the interval can be reproduced once or repeatedly. The data in the interval can be accurately confirmed by being monitored repeatedly. Further, when a skip button 11h is depressed, data is reproduced while skipping data in the selected interval. By using the monitoring function of the skip button 11h, for example, even if there is a noise defect in the disc, the noise defect can be preliminarily confirmed. Consequently, a defective output from the speaker 9a can be avoided. The embodiment is effective in live broadcasting by a DJ or the like

who prepares a plurality of audio data to be reproduced next during outputting a sound.

According to the invention, there are comprised the storing means for reading the recording data recorded on the optical disc and storing the read data, the output means for outputting the recording data stored in the storing means, and the input means for inputting the address of the recording data stored in the storing means, and it is controlled so that the reading operation of the recording data is started from an address inputted by the inputting means. Therefore, the recording data can be outputted from the inputted address and monitored.

According to the invention, there are comprised the storing means for reading the recording data recorded on the optical disc and storing the read data, the output means for outputting the recording data stored in the storing means, and the input means for inputting the address of the recording data stored in the storing means, and it is controlled so that the reading operation of the recording data is stopped at an address inputted by the input means. Therefore, the output of the recording data can be stopped from the inputted address. Since the audio data can be paused, the head of data can be searched.

According to the invention, there are comprised the storing means for reading the recording data recorded on the optical disc and storing the read data, the output means for outputting the recording data stored in the storing means, and the input means for inputting the address of the recording data stored in the storing means, and it is controlled so that the recording data between two addresses inputted by the input means can be repeatedly read. Therefore, the recording data between the inputted addresses can be repeatedly outputted. Melody in a specific part of the recording data can be reproduced.

According to the invention, there are comprised the storing means for reading the recording data recorded on the optical disc and storing the read data, the output means for outputting the recording data stored in the storing means, and the input means for inputting the address of the recording data stored in the storing means, and it is controlled so as to read the recording data while skipping recording data between two addresses inputted by the input means. Therefore, the recording data can be outputted while skipping the recording data between the inputted addresses. When there is a noise defect in the disc, the audio data can be reproduced while skipping the defective part.

According to the invention, since there is comprised the judging means for judging the level of the recording data between the addresses inputted by the input means of the optical disc reproducing apparatus, the output level of the recording data can be adjusted.

According to the invention, a volume control for variably inputting the address is used as the input means in the optical disc reproducing apparatus and an address position of the recording data stored in the storing

means and a position in the volume control are related, so that the position of the inputted address of the recording data stored in the storing means can be visually confirmed. When the recording data is data of a musical piece, the reproducing position of the piece can be sensuously grasped. It is, therefore, easy to search and reproduce melody in a specific part.

According to the invention, there are provided the storing means for reading the recording data recorded on the optical disc and storing the read data, the output means for outputting the stored recording data, and the input means for inputting the address of the recording data stored in the storing means, and it is controlled so as to start or stop the reading operation of the recording data from the address inputted by the input means, so that the recording data between the inputted addresses can be preliminarily read and edited. Consequently, the useful optical disc reproducing apparatus which can prevent inconveniences such that the sound in which a part of audio data is skipped due to the defect in the disc is generated as it is.

#### Claims

1. An optical disc reproducing apparatus for reproducing recording data recorded on an optical disc, comprising:

reproducing means for reproducing the recording data recorded on the optical disc;  
storing means for storing the recording data reproduced by the reproducing means;  
input means for inputting at least one address of the recording data stored in the storing means;  
output means of at least one system for outputting the recording data stored in the storing means; and  
control means for controlling so as to read the recording data based on the address inputted by the input means and to output the recording data from the output means.

2. The optical disc reproducing apparatus of claim 1, further comprising judging means for judging a level of the recording data between addresses inputted by the input means.

3. The optical recording apparatus according to any one of claims 1 to 2,  
wherein, said control means controls so as to read the recording data from a address inputted by the input means and to output the recording data from the output means.

4. The optical recording apparatus according to any one of claims 1 to 2,

said control means controls so as to stop reading the recording data at an address inputted by the input means.

5. The optical recording apparatus according to any one of claims 1 to 2, 5

said control means controls so as to read the recording data between two addresses inputted by the input means and to output the recording data from the output means. 10

6. The optical recording apparatus according to any one of claims 1 to 2,

said control means controls so as to read the recording data stored in the storing means by skipping data between two addresses inputted by the input means and to output means. 15

7. The optical recording apparatus according to claim 2 wherein said judging means includes; 20

monitoring means for monitoring a level of the recording data,  
comparing means for comparing the level of the recording data monitored by the monitoring means with a threshold level, 25  
first time storing means for storing a first time when the level of the recording data exceeds the threshold level,  
reducing means for reducing the level of the recording data at a time when it goes back time from the first time by predetermined time, 30  
second time storing means for storing a second time when the level of the recording data is within the threshold level, and 35  
raising means for raising the level of the recording data so as to return the level of the recording data to the original level of the recording data by a time when it gain predetermined time from the second time. 40

8. The optical recording apparatus according to any one of the above claims wherein the input means is operable to input any address of the storing means. 45

50

55

FIG. 1

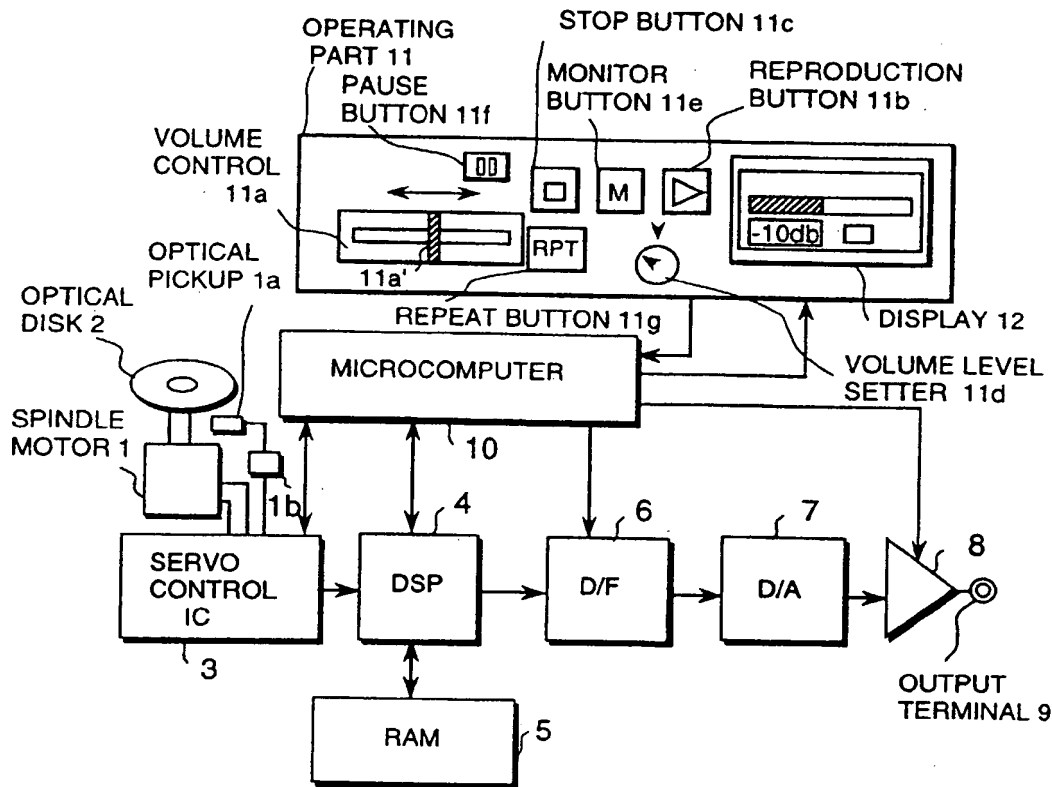


FIG. 2

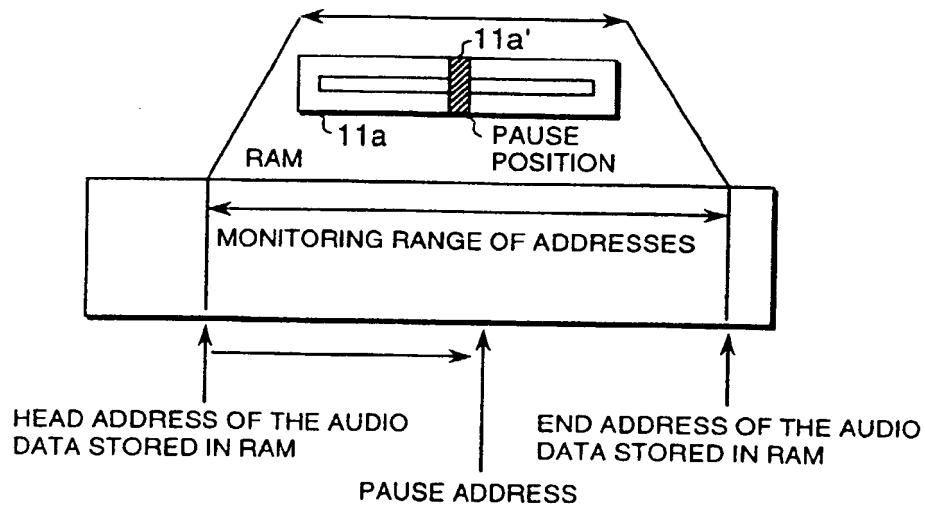


FIG. 3

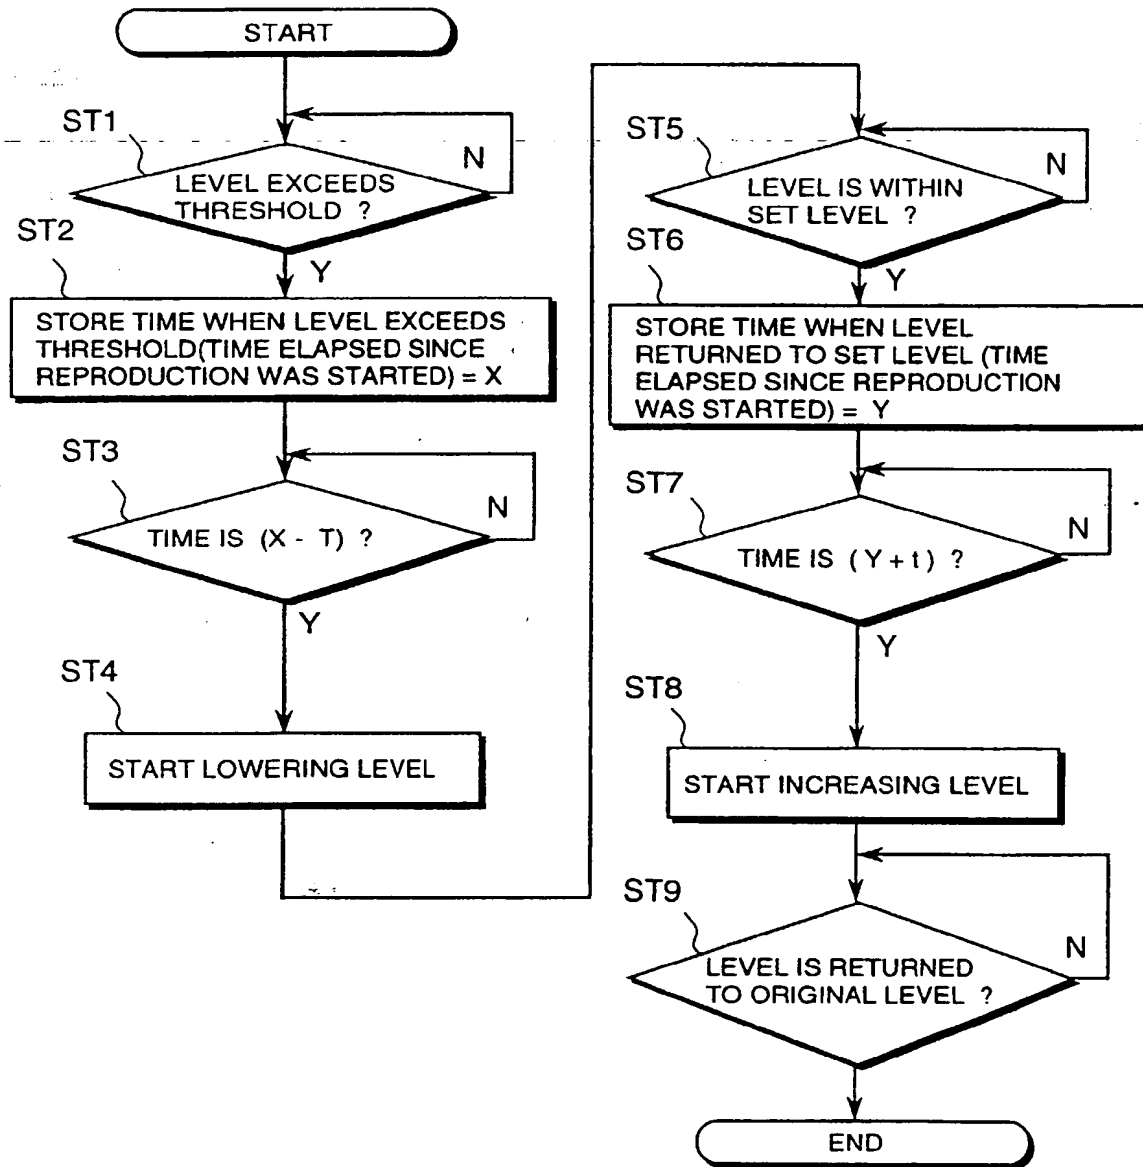


FIG. 4


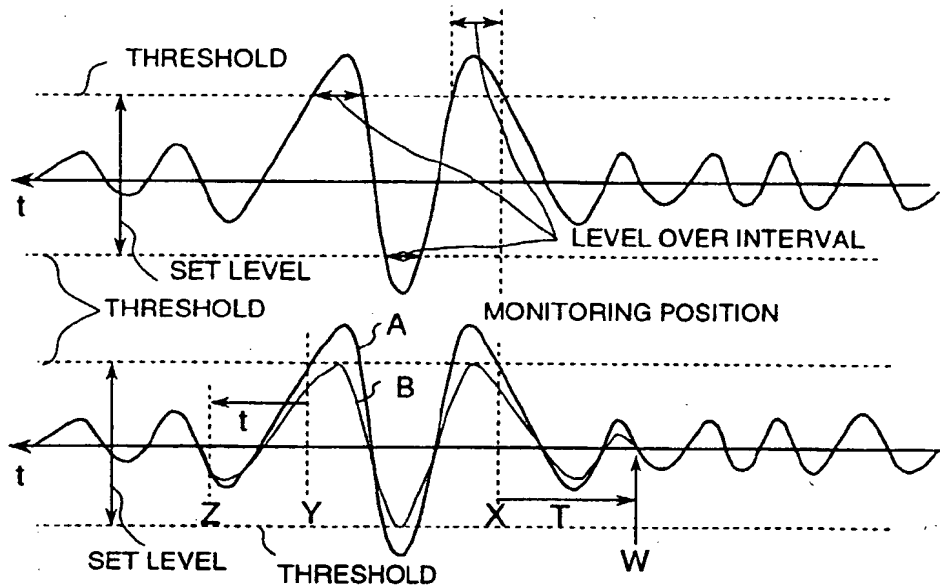


FIG. 5





(19)

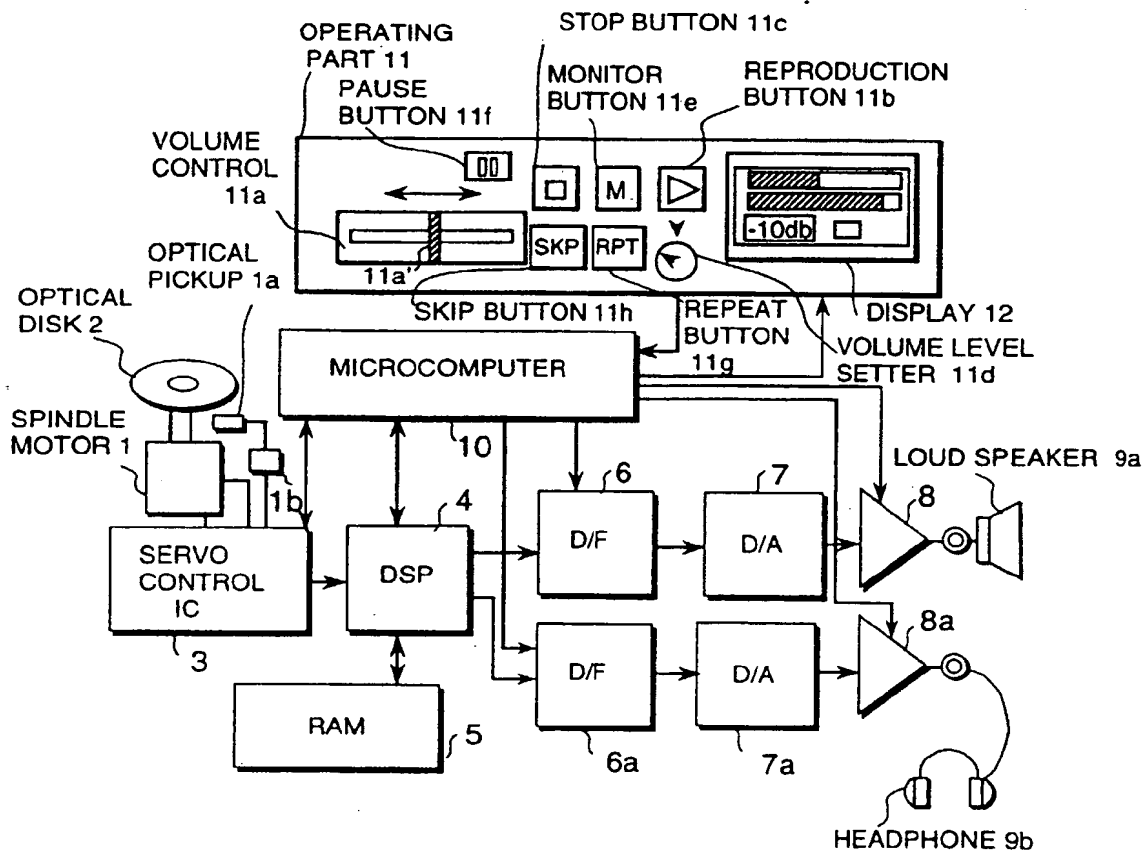

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 844 614 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
23.02.2000 Bulletin 2000/08

(51) Int Cl.7: **G11B 27/10**, G11B 27/36,  
G11B 19/02, G11B 27/34

(43) Date of publication A2:  
27.05.1998 Bulletin 1998/22

(21) Application number: **97307644.1**

(22) Date of filing: **20.09.1997**

(84) Designated Contracting States:  
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE**

(30) Priority: **20.11.1996 JP 32479596**

(71) Applicant: **Nippon Columbia Co., Ltd.**  
**Tokyo 107-11 (JP)**

(72) Inventor: **Usui, Shunji**  
**Shirakawa, Fukushima 961 (JP)**


(74) Representative: **Hackney, Nigel John et al**  
**Mewburn Ellis,**  
**York House,**  
**23 Kingsway**  
**London WC2B 6HP (GB)**

## (54) Optical disc reproducing apparatus

(57) -An optical disc reproducing apparatus which is useful and can preliminarily read and edit audio data to be reproduced and output the edited data is provided. The optical disc reproducing apparatus comprising: reproducing means for reproducing recording data of an optical disc; storing means for storing the recording data

reproduced from the optical disc; input means for inputting an address of the recording data stored in the storing means; output means of at least one system for outputting the recording data stored in the storing means; and control means for controlling so as to read the recording data from a start address inputted by the input means and output the read data from the output means.

FIG. 1

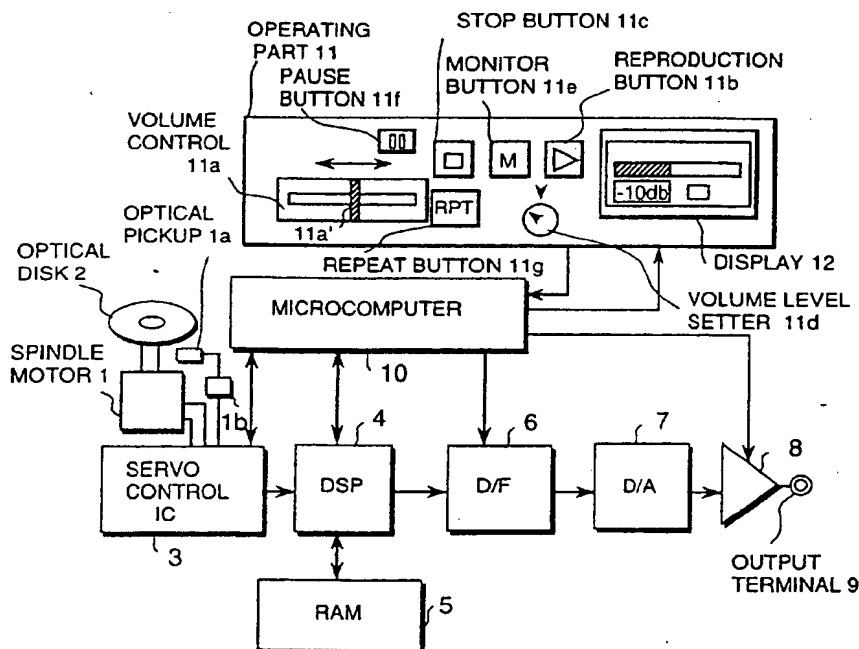



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 97 30 7644

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	US 5 375 106 A (KAWACHI HIDEO ET AL) 20 December 1994 (1994-12-20) * the whole document *	1	G11B27/10 G11B27/36 G11B19/02 G11B27/34
A	EP 0 663 742 A (HUEBINGER HANS ROLAND ; LORES BORRAS CARLO (ES)) 19 July 1995 (1995-07-19) * the whole document *	1	
A	DE 43 13 177 A (MITSUBISHI ELECTRIC CORP) 21 October 1993 (1993-10-21) * column 6, line 49 - column 14, line 46 *	1,2	
A	EP 0 640 971 A (PIONEER ELECTRONIC CORP) 1 March 1995 (1995-03-01) * the whole document *	1	
A	US 5 199 019 A (MATSUMURA ASAYUKI ET AL) 30 March 1993 (1993-03-30) * column 3, line 6 - column 5, line 57 *	1	
A	WO 92 12515 A (BLAKEWAY IAN ; HOLMES FRANK (GB)) 23 July 1992 (1992-07-23) * page 1, line 1 - page 2, line 23 *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.6) G11B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 22 December 1999	Examiner Mourik, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 30 7644

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-12-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5375106 A	20-12-1994	JP 5159540 A	25-06-1993
EP 0663742 A	19-07-1995	ES 2078849 A	16-12-1995
		AU 682202 B	25-09-1997
		AU 7345894 A	28-02-1995
		JP 8502139 T	05-03-1996
		US 5675557 A	07-10-1997
		CA 2144981 A	09-02-1995
		CN 1114120 A, B	27-12-1995
		WO 9504410 A	09-02-1995
		ES 2108636 A	16-12-1997
DE 4313177 A	21-10-1993	JP 6103699 A	15-04-1994
		US 5680379 A	21-10-1997
		US 5852593 A	22-12-1998
EP 0640971 A	01-03-1995	JP 7065506 A	10-03-1995
		DE 69421479 D	09-12-1999
		US 5502703 A	26-03-1996
US 5199019 A	30-03-1993	JP 2884600 B	19-04-1999
		JP 3035474 A	15-02-1991
		US 5224089 A	29-06-1993
WO 9212515 A	23-07-1992	AU 9131691 A	17-08-1992
		EP 0565556 A	20-10-1993

EPO J. OPM. PM459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**